

QUADRI DI STRINGA CABLATI
Serie MB – Scheda tecnica

- Approvazioni e Conformità
• Direttiva Bassa Tensione 2006/95/CE
• EN IEC 61439-1/2
• CEI 17-13/1
• CEI 82-25.



Bremas Erscse S.p.A.
Via Castellazzo 9 – 20040 Cambiago (MI)
Tel +39 02 95651611 Fax +39 02 95651639
www.bremas.it info@bremas.it
ISO 9001 Certified Quality System

MBD06A44T2F20

Table with 4 columns: Dimensioni, L / H / W, Forma, and values. Rows include dimensions (424 x 460 x 140), segregation form (CEI 17-13/1), protection degree (IP 65), material (polycarbonate), and connection details (Staubli MC4-EVO2).

Table with 4 columns: Valori nominali, Udc, V, and values. Rows include nominal voltage (600V), current (20A), and protection characteristics (50A, 40A).


Table with 4 columns: Valori nominali, Udc, V, and values. Rows include nominal voltage (1000V), current (20A), and protection characteristics (10x38mm, 30kA).

Table with 4 columns: Valori nominali, Ucpv, V, and values. Rows include nominal voltage (600V), current (20A), and protection characteristics (40A, -).

Table with 4 columns: Valori nominali, Uac, V, and values. Rows include nominal voltage (600V), current (20A), and protection characteristics (40A, -).

Table with 4 columns: Valori nominali, IΔn, mA, and values. Rows include nominal current (20A), frequency (50Hz), and protection characteristics (40A, -).

Table with 4 columns: Valori nominali, Uc, V, and values. Rows include nominal voltage (600V), current (20A), and protection characteristics (40A, -).

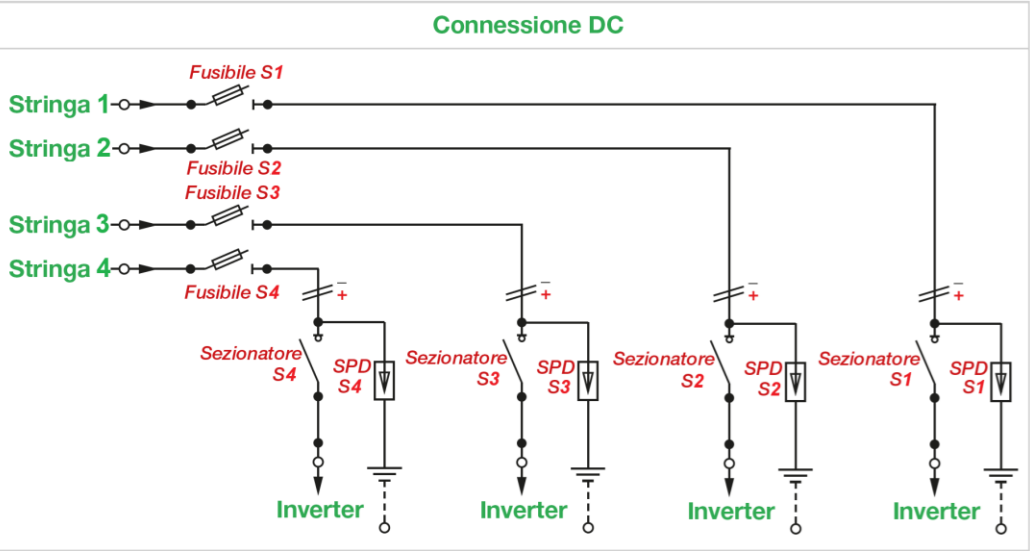

©2026 Copyright Bremas Erscse. Subject to change without notice and errors excepted. Data reported in this paper are carefully checked and represent typical values of series production. The descriptions of the device and its applications, contexts of use, details of external controls, information on installation and operation are provided to the best of our knowledge. In any case, this does not mean from the features described it may derive legal responsibilities that extend beyond the "Terms and Conditions of sales" of Bremas Erscse. The customer / user must examine our information and recommendations and the relevant technical regulations before using the products its own purpose.